


Stingray Anchor

Jeyco Australia is the originator of the Stingray Anchor – The worlds most efficient drag embedment anchor. Stingray anchors provide ultimate holding powers that are proving superior to other mooring anchors on the market. Although the weight is 75% of the ordinary anchor, the holding power is 1.3 times that of the ordinary anchor.

Stingray anchors are commonly used in storm and cyclone mooring systems, aquaculture fish cage mooring systems, hold back moorings, and various other applications. Stingray Anchors embeds very quickly resulting in minimal ground disturbance which is a huge factor in areas that are environmentally sensitive. Traditional ship anchors can create seabed scarring, taking a long time to repair.

The Stingray Anchor offers a lightweight and foldable design that allows for easy disassembly and assembly without the need for special tools. This convenient foldable feature not only provides convenience but also helps to reduce transportation costs significantly.

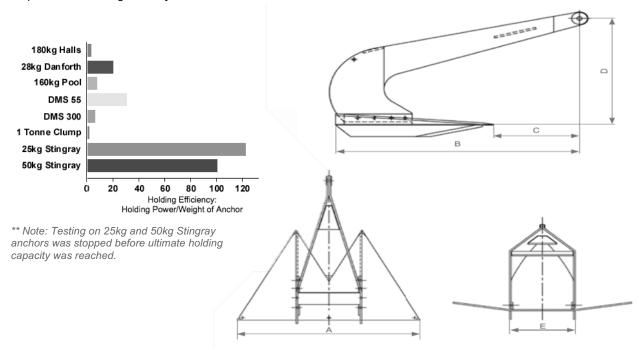

| | Dimensions | | | | | |
|-------------|------------|------|------|------|------|------|
| Weight (KG) | Colour | A | В | С | D | E |
| 10 | Yellow | 574 | 580 | 197 | 339 | 210 |
| 25 | Yellow | 828 | 836 | 284 | 486 | 300 |
| 50 | Green | 1013 | 1023 | 347 | 598 | 368 |
| 75 | Yellow | 1060 | 1070 | 363 | 625 | 385 |
| 100 | Blue | 1171 | 1182 | 401 | 691 | 426 |
| 150 | Green | 1258 | 1271 | 432 | 742 | 458 |
| 250 | Yellow | 1515 | 1530 | 519 | 895 | 550 |
| 375 | Blue | 1748 | 1765 | 599 | 1031 | 635 |
| 500 | Green | 2024 | 2045 | 694 | 1190 | 736 |
| 750 | Yellow | 2222 | 2243 | 761 | 1311 | 808 |
| 1000 | Yellow | 2491 | 2516 | 854 | 1470 | 905 |
| 1500 | Yellow | 2868 | 2896 | 983 | 1691 | 1043 |
| 2000 | Yellow | 3078 | 3109 | 1055 | 1817 | 1119 |
| 3000 | Yellow | 3638 | 3719 | 1312 | 2160 | 1311 |
| 4000 | Yellow | 3864 | 3808 | 1456 | 2221 | 1544 |
| 5000 | Yellow | 4248 | 4291 | 1456 | 2504 | 1544 |

| | HOLDING POWER | | | | |
|-------------|------------------|-------------------------|------------------|--|--|
| Weight (KG) | Sand (Tonnes) | Medium Clay (Tonnes) | Silt (Tonnes) | | |
| 10 | 2.39 | 1.85 | 1.34 | | |
| 25 | 4.95 | 3.83 | 2.77 | | |
| 50 | 8.59 | 6.65 | 4.8 | | |
| 75 | 12.03 | 9.09 | 6.57 | | |
| 100 | 14.91 | 11.54 | 8.34 | | |
| 150 | 20.58 | 15.93 | 11.51 | | |
| 250 | 30.89 | 23.92 | 17.27 | | |
| 375 | 42.64 | 33.01 | 23.84 | | |
| 500 | 53.60 | 41.50 | 29.97 | | |
| 750 | 73.99 | 57.28 | 41.37 | | |
| 1000 | 93.00 | 72.00 | 52 | | |
| 1500 | 128.37 | 99.39 | 71.78 | | |
| 2000 | 161.36 | 124.93 | 90.22 | | |
| 3000 | 222.74 | 172.44 | 124.54 | | |
| 4000 | 279.98 | 216.76 | 156.55 | | |
| 5000 | 334.32 | 258.83 | 186.93 | | |